

STONE SEAL
NATURAL STONE RESTORATION AND CONCRETE POLISHING

Wallcrete



- 3. About
- 4. Colour
- 6. Technical
- 7. Maintenance



Wallcrete (WRC)


Wallcrete is a continuous, 2-layer coating, 3 mm thick, with a trowled cement texture, available in the 10 Warm Collection colours. Wallcrete is hand made by skilled decorators, and any distinctive marks and irregularities in the surface are proof of its refined and exclusive nature.

Wallcrete is indicated for internal surfaces (coatings on columns, shelves, worktops and other architectural elements); for all rooms in the house and for all commercial areas, including coating of shower interiors (with the insertion of Aquasafe Wall waterproofing).

Wallcrete is a surface with a great aesthetic impact that enhances the physical texture of the cement. It has a texture that features irregularities, marbling and vibrations in the material that are the fruit of imperfections typical of hand-crafted products. It is a coating that gives great depth and offers surprising light refraction effects, with a matt finish, that redefine the style and design of rooms, creating a fascinating and elegant atmosphere. Wallcrete's finish is warm, soft and silky to the touch.

Warm Collection

WR01




WR02




WR03




WR04




WR05




WR06



WR07



WR08



WR09



WR10






Characteristics and technical information

- Kerakoll 2-layer Technology (K2S) with Wallcrete ensures high performance in terms of resistance, non-absorbency and lightness
- Dynamic surface: thanks to Kerakoll 2-layer Technology (K2S) the colour of the covering can be changed quickly and easily, again and again
- Eco-friendly, water based and extremely low environmental impact
- Safeguards the health of both people and the environment
- Ideal for very thin coating of existing surfaces
- Can be applied over old tiles without demolition
- Scratch resistance (ISO 1518 Clements Test): 2 kg (excellent)
- Chemical resistance (EN 12720): Class 5 (excellent), stain-proof and resistant to detergents and aggressive substances
- Health and safety (EN 71-3): Compliant, not dangerous in contact with a child's mouth
- Suitable for covering environments intended for food preparation (HACCP UNI 11021-2002): Compliant
- Reaction to fire (EN 13501): Bs1-d0 Class

Kerakoll 2-layer Technology in just 3 mm of thickness

Wallcrete is an innovative material, the fruit of exclusive technology developed at the Kerakoll GreenLab R&D laboratories, which has resulted in a 2-layer surface just 3 mm in thickness.

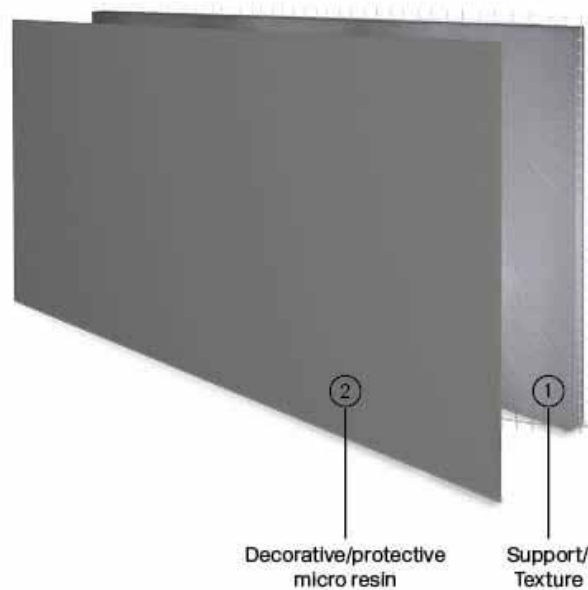

2-layer Wallcrete covering system

1ST LAYER

— Wallcrete: Texturizing finishing layer in cement-polymer matrix reinforced with glass-fibre mesh (Net 90)

2ND LAYER

— Microresina Wall: New generation micro resin water-based polymer matrix layer (to be applied in 3 coats)

Re-design of the home

Surfaces in Kerakoll 2-layer Technology Wallcrete are dynamic, because they can be renewed an infinity of times: once they have been applied the design of your home can be changed quickly, by means of a light sanding operation followed by application of a new coloured microfilm.

Easy to repair

In the event of accidental local damage caused by improper use of the surface, Wallcrete can be repaired quickly and precisely using Repair Pro professional gel, available in the 10 Warm Collection colours.

STONE SEAL

NATURAL STONE RESTORATION AND CONCRETE POLISHING



www.stoneseal.ie
info@stone seal.ie

Unit 10-12 Willsborough Business Park, Clonsghaugh Technology Park,
Dublin 17

018770436